


BP-410

Mobile Thermal Printer

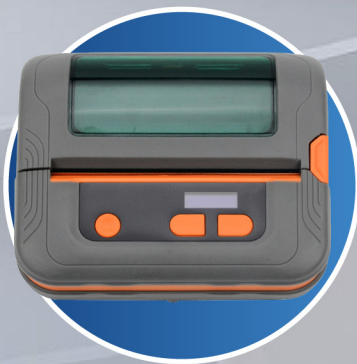

Key features

- 4" Size Bluetooth Printer : Small enough to fit in your pocket but mighty enough to print your labels with precision anywhere and anytime.
- With a maximum print width of 104mm, our printer is your go-to for diverse label and receipt sizes.
- Load up to 50mm of roll paper and watch your productivity soar with less downtime for refills.

Applications



Shopping



Mart



Warehouse



Hospital



Logistics



Ticketing

www.bopuson.com

BP410 Mobile Thermal Printer



Specifications		
Printer Characteristics	Printer Name	BP410
	Printing Method	Direct Thermal
	Resolution	203dpi
	Maximum Print Speed	Tag Model:50mm/s(1.97inch/s) Label Model:40mm/s(1.57inch/s)
	Maximum PrintWidth	104mm(4inch)
	Print Density	8dot/mm
	Label Height	286mm
	Voice/Command Set	TSPL,CPCL,ESC/POS
	Paper Retraction	Supported
Memory	RAM	8MB
	Flash Memory	16MB
Print Head	Print Head Brand	SHEC
	Print Head Life	30KM
Paper Cutting	Paper Cutting Method	Manual Tearing
Media Characteristics	Paper Type	Label Paper, Continuous Paper, Black Mark Paper
	Width	25-112mm(1inch-4.4inch)
	Outer Diameter of Paper Roll	50mm(1.97inch)
	Media Thickness	0.06mm-0.2mm(0.0024inch-0.0079inch)
Operating Parameters	Sensor Type	Transmissive Sensor, Reflective Sensor
	Operating Temperature/Humidity	Temperature: 0°C-50°C Humidity: 25%-85%
	Storage Temperature/Humidity	Temperature: -10°C-60°C Humidity: 10%-90%
Electrical Specifications	Electrical Parameters	7.4V/3000mAh
	Battery	300times ≥80%
	Agency Certification Standards	3C Certification
Physical Parameters	Dimension(L*W*H)	127mm x 147mm x 64mm (5inch x 5.79inch x 2.64inch)
	Weight	With Battery : 542g / Not with Battery: 440g
Communication Interfaces and Functions	Standard Configuration	USB/Bluetooth/WIFI(optional)
Fonts/Graphics/Symbols	Characters	ASCII Font A: 12×24 ASCII Font B: 9×17
	Columns	832dots/line
	Row Spacing	3.75mm(0.15inch)
	Extended Code Page	P0 437, P5 865, P1 Katakana, P6 West Europe, P2 850, P7 Greek, P3 860, P8 Hebrew, P4 863,P9 East Europe
	Graphic Features	PCX, BMP
	User-Defined Characters	Supported
Barcode Types	Direct Bitmap Printing	Supported
	1D	CODE128,EAN128,ITF,CODE39,EAN13,EAN13+2,EAN13+5,EAN8,EAN8+2,EAN8+5,CODABAR,POSTNET,UPC-A,UPC-A+2,UPC-A+5,UPC-E,UPC-E+2,UPC-E+5,CPOST,MSI,MSIC,PLESSEY,ITF14,EAN14
	2D	QRCODE
Others	Processor	GD32F207ZCT6
	System Support Platforms	iOS,Android,Windows,Mac,Linux
	Noise	65db
	Protection Rating	IP42