

# BW17BT




## 2D Bluetooth Barcode Scanner



### Product Feature

- Scan 1D and 2D barcodes quickly and accurately
- 2.4G and Bluetooth wireless connections
- Advanced imaging decoding algorithm to interpret various abnormal barcodes
- High-strength ABS+PC shell, shockproof and anti-fall
- 100 meters wireless transmission distance
- Multifunctional charging base

### Product Size

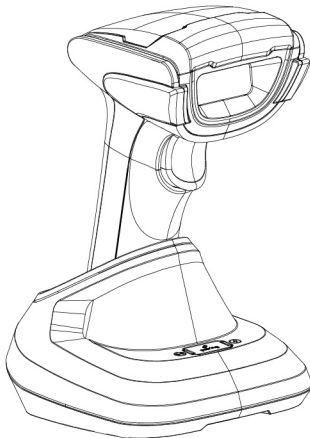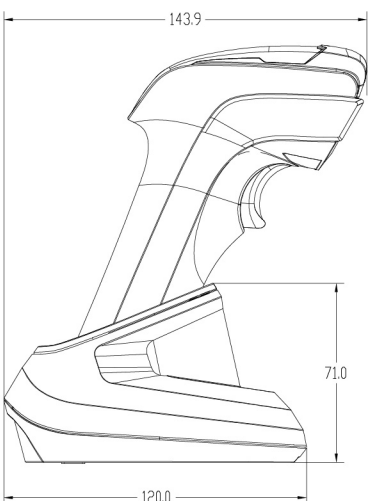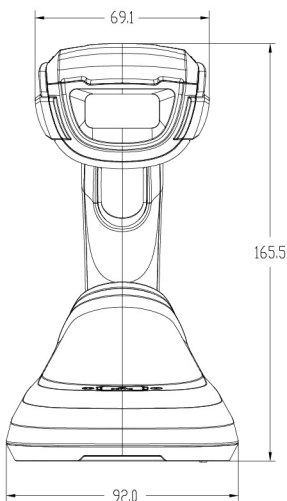

www.bopuson.com

# BW17BT



### Performance Parameters

Light Type:	White lighting, red aiming light
Supported Symbologies:	<b>1D:</b> Codabar, Code39, Code32Pharmaceutical (PARAF), Interleaved 2 of 5, NEC 2 of 5, Code 93, Straight 2 of 5Industrial, Straight 2 of 5 IATA, Matrix 2 of 5, Code 11Code128, GS1-128, UPC-A, UPC-E, EAN/JAN-8, EAN/JAN-13, MSI, GS1 DataBar Omnidirectional, GS1 DataBarLimited, GS1 DataBar Expanded, China Post(Hong Kong 2 of 5), Korea Post. <b>2D:</b> Codeblock A, Codeblock F, PDF417, Micro PDF417, GS1 Composite Codes, QR Code, Data Matrix, MaxiCode.Aztec, HANXIN.
Scan Type:	Image CMOS
Scan Mode:	Manual/Continuous/Automatic Scintillation
Scan Angle:	Yaw65°, Rotaion 360°, Pitch65°
Resolution:	640*480
Contrast:	≥20%
Depth of scan field:	Code39(5mi): 7-16cm, Code39(13mil): 7-32cmQR code(15mil): 3-18cm, Code128(20mil): 6-35cm
Error Rate:	1/5million
Interface:	USB-HID, USB-COM
Communication mode:	Paired dedicated receiver: 2.4g communication; Paired mobile bluetooth devices: Dual mode bluetooth
Transmission distance:	100M(Open Yard)
Storage Mode:	Offline Storage Mode: Data is automatically stored when the scanner leaves the connection range.Storage capacity is 200K characters Inventory storage mode: The scanner can enter inventory mode and has a storage capacity of 200K characters.
Pairing Mode:	One to One: A scanner gun paired with a base; A scanner pairs with a Bluetooth mobile device.
Receiver:	Dedicated base receiver, Android/IOS mobile device

### Environmental Parameters

Operating Temperature: -20°C~50°C  
Storage Temperature: -40°C~70°C  
Relative Humidity: 0%~95% (Non-condensing)  
Drop/Shock Resistance: Withstands multiple times 1.5 meters drops to concrete

### Physical Parameters

Dimensions: 69mm\*83.6mm\*173.6mm  
Material: ABS+PC Cable Length: 1M  
Ambient lighting: 0~100000LUX

### Electrical Parameters

Voltage: DC5V±5%	Battery Working Time: 6h	Lithium battery: 2200mA
Operating Current: When working without scanning codes ≥35mA; When scanning code at work ≥300mA.		
Standby Current: 0mA(Standby is to cut off battery power)	Charging Time: 3h	
Charging Mode: Typce charging cable, plug into the base for direct charging		

### Application

